SIEMENS

Data sheet 3RW3036-1BB14



SIRIUS soft starter S2 45 A, 22 kW/400 V, 40 °C 200-480 V AC, 110-230 V AC/DC Screw terminals

eneral technical data		
product brand name		SIRIUS
product feature		
 integrated bypass contact system 		Yes
• thyristors		Yes
product function		
intrinsic device protection		No
 motor overload protection 		No
 evaluation of thermistor motor protection 		No
 external reset 		No
adjustable current limitation		No
inside-delta circuit		No
product component motor brake output		No
insulation voltage rated value	V	600
degree of pollution		3, acc. to IEC 60947-4-2
reference code according to EN 61346-2		Q
reference code according to DIN 40719 extended according to IEC 204-2 according to IEC 750		G
ower Electronics		
product designation		Soft starter
operational current		
• at 40 °C rated value	Α	45
• at 50 °C rated value	Α	42
• at 60 °C rated value	А	39
yielded mechanical performance for 3-phase motors		
• at 230 V		
— at standard circuit at 40 °C rated value	kW	11
• at 400 V		
— at standard circuit at 40 °C rated value	kW	22
yielded mechanical performance [hp] for 3-phase AC motor at 200/208 V at standard circuit at 50 °C rated value	hp	10
operating frequency rated value	Hz	50 60
relative negative tolerance of the operating frequency	%	-10
relative positive tolerance of the operating frequency	%	10
operating voltage at standard circuit rated value	V	200 480
relative negative tolerance of the operating voltage at standard circuit	%	-15
relative positive tolerance of the operating voltage at standard circuit	%	10
minimum load [%]	%	10
continuous operating current [% of le] at 40 °C	%	115

power loss [W] at operational current at 40 °C during operation bytes of training of the control supply voltage properties bytes of voltage of the control supply voltage at 25 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5			
Sentral Central Sentral Sentral Se		W	6
type of voltage of the control supply voltage control supply voltage frequency 7 reted value control supply voltage frequency 2 reted value relative negative tolorance of the control supply voltage frequency control supply voltage 1 at AC at 59 Pz control supply voltage 1 at AC at 59 Pz control supply voltage 1 at AC at 59 Pz control supply voltage 1 at AC at 69 Pz control supply voltage 1 at AC at 69 Pz control supply voltage 1 at AC at 69 Pz control supply voltage 1 at AC at 69 Pz control supply voltage 1 at AC at 69 Pz control supply voltage 1 at AC at 69 Pz control supply voltage 1 at AC at 69 Pz control supply voltage 1 at AC at 69 Pz control supply voltage 1 at AC at 69 Pz control supply voltage 1 at AC at 69 Pz control supply voltage 1 at AC at 60 Pz relative negative tolorance of the control supply voltage at AC at 60 Pz relative negative tolorance of the control supply voltage at AC at 60 Pz relative negative tolorance of the control supply voltage at AC at 60 Pz relative negative tolorance of the control supply voltage at AC at 60 Pz relative negative tolorance of the control supply voltage at AC at 60 Pz relative negative tolorance of the control supply voltage at AC at 60 Pz relative negative tolorance of the control supply voltage at AC at 60 Pz relative negative tolorance of the control supply voltage at AC at 60 Pz relative negative tolorance of the control supply voltage at AC at 60 Pz relative negative tolorance of the control supply voltage at AC at 60 Pz relative negative tolorance of the control supply voltage at AC at 60 Pz relative negative tolorance of the control supply voltage at AC at 60 Pz relative negative tolorance of the control supply voltage at AC at 60 Pz relative negative tolorance of the control supply voltage at AC at 60 Pz relative negative negative tolorance of the control supply voltage at AC at 60 Pz relative negative negative tolorance of the control supply voltage at AC at 60 Pz relative negative negative negative negative negative negative negative negative negative ne			
control supply voltage frequency 1 rated value control supply voltage frequency 2 rated value relative negative blorance of the control supply voltage frequency control supply voltage at 1A Ca at 90 Hz control supply voltage at 1A Ca at 90 Hz control supply voltage at 1A Ca at 90 Hz control supply voltage at 1A Ca at 90 Hz voltage supply voltage at 1A Ca at 90 Hz voltage supply voltage at 1A Ca at 90 Hz voltage supply voltage at 1A Ca at 90 Hz voltage supply voltage at 1A Ca at 90 Hz voltage supply voltage at 1A Ca at 90 Hz voltage supply voltage at 1A Ca at 90 Hz voltage supply voltage at 1A Ca at 90 Hz voltage supply voltage at 1A Ca at 90 Hz voltage supply voltage at 1A Ca at 90 Hz voltage supply voltage at 1A Ca at 90 Hz voltage supply voltage at 1A Ca at 90 Hz voltage supply voltage at 1A Ca at 90 Hz voltage supply voltage at 1C voltage sup			ACIDO
control supply voltage frequency 2 rated value registers engagetive tolerance of the control supply voltage frequency requency control supply voltage 1 at AC at 50 Hz V 110230		11-	
relative negative tolerance of the control supply voltage frequency control supply voltage 1 at AC at 50 Hz Control supply voltage 1 at AC at 50 Hz V 110 230 relative negative tolerance of the control supply voltage at AC at 50 Hz V 110 230 relative negative tolerance of the control supply voltage at AC at 50 Hz relative positive tolerance of the control supply voltage at AC at 50 Hz Relative negative tolerance of the control supply voltage at AC at 50 Hz Relative negative tolerance of the control supply voltage at AC at 50 Hz Relative positive tolerance of the control supply voltage at AC at 60 Hz Relative negative tolerance of the control supply voltage at AC at 60 Hz Relative negative tolerance of the control supply voltage at BC Control supply voltage 1 at DC relative negative tolerance of the control supply voltage at BC Relative negative tolerance of the control supply voltage at BC Relative negative tolerance of the control supply voltage at BC Relative negative tolerance of the control supply voltage at BC Relative negative tolerance of the control supply voltage at BC Relative negative tolerance of the control supply voltage at BC Relative negative tolerance of the control supply voltage at BC Relative negative tolerance of the control supply voltage at BC Relative negative tolerance of the control supply voltage at BC Relative negative tolerance of the control supply voltage at BC Relative negative tolerance of the control supply voltage at BC Relative negative tolerance of the control supply voltage at BC Relative negative negative tolerance of the control supply voltage at BC Relative negative negative tolerance of the control supply voltage at BC Relative negative negative tolerance of the control supply voltage at BC Relative negative negat			
frequency Interview of the control supply voltage frequency Control supply voltage 1 at AC at 50 Hz Control supply voltage 1 at AC at 50 Hz Control supply voltage 1 at AC at 50 Hz Control supply voltage 1 at AC at 50 Hz Control supply voltage 1 at AC at 50 Hz Library of the control supply voltage at AC at 50 Hz AC at 50 Hz Interview of the control supply voltage at AC at 50 Hz AC at 50 Hz Interview of the control supply voltage at AC at 50 Hz Interview of the control supply voltage at AC at 50 Hz Interview of the control supply voltage at AC at 50 Hz Interview of the control supply voltage at AC at 50 Hz Interview on the control supply voltage at AC at 50 Hz Interview of the co			
trequency Control supply voltage 1 at AC at 50 Hz Control supply voltage 1 at AC at 50 Hz Control supply voltage 1 at AC at 50 Hz V 110 230 Indicative positive tolerance of the control supply voltage at AC at 50 Hz V 110 230 Indicative positive tolerance of the control supply voltage at AC at 50 Hz V 110 230 Indicative positive tolerance of the control supply voltage at AC at 50 Hz V 110 230 Indicative positive tolerance of the control supply voltage at AC at 50 Hz V 110 230 Indicative positive tolerance of the control supply voltage at AC at 60 Hz V 110 230 Indicative positive tolerance of the control supply voltage at AC at 50 Hz V 110 230 Indicative positive tolerance of the control supply voltage at AC at 50 Hz V 110 230 Indicative positive tolerance of the control supply voltage at AC at 50 Hz V 110 230 Indicative positive tolerance of the control supply voltage at AC at 50 Hz V 110 230 Indicative positive tolerance of the control supply voltage at AC at 50 Hz V 110 230 Indicative positive tolerance of the control supply voltage at AC at 50 Hz V 110 230 Indicative positive tolerance of the control supply voltage at AC at 50 Hz V 110 230 Indicative positive tolerance of the control supply voltage at AC at 50 Hz V 110 230 Indicative positive tolerance of the control supply voltage at AC at 50 Hz V 110 230 Indicative positive tolerance of the control supply voltage at AC at 50 Hz V 110 230 Indicative positive tolerance of the control supply voltage at AC at 50 Hz V 110 230 Indicative positive tolerance of the control supply voltage at AC at 50 Hz V 110 230 Indicative positive tolerance of the control supply voltage at AC at 50 Hz V 110 230 Indicative positive tolerance of the control supply voltage at AC at 50 Hz V 110 230 Indicative positive tolerance of the control supply voltage at AC at 50 Hz V 110 230 Indicative positive tolerance of the control supply voltage at AC at 50 Hz V 110 230 Indicative positive tolerance of			-10
control supply voltage 1 at AC at 60 Hz relative negative tolerance of the control supply voltage at AC at 60 Hz relative positive tolerance of the control supply voltage at AC at 80 Hz relative positive tolerance of the control supply voltage at AC at 80 Hz relative positive tolerance of the control supply voltage at AC at 80 Hz relative positive tolerance of the control supply voltage at AC at 80 Hz relative positive tolerance of the control supply voltage at AC at 80 Hz relative positive tolerance of the control supply voltage at AC at 80 Hz relative positive tolerance of the control supply voltage at CC relative negative tolerance of the control supply voltage at CC display version for fault signal Restancial crims Restancia crims Restancia crims Restancia crims Restancia crims Restancia crims Restan		%	10
relative positive tolerance of the control supply voltage at AC at 50 Hz. relative positive tolerance of the control supply voltage at AC at 50 Hz. relative positive tolerance of the control supply voltage at AC at 50 Hz. relative positive tolerance of the control supply voltage at AC at 50 Hz. relative positive tolerance of the control supply voltage at AC at 50 Hz. control supply voltage 1 at DC relative positive tolerance of the control supply voltage at AC at 50 Hz. control supply voltage 1 at DC relative positive tolerance of the control supply voltage at BC display version for fault signal week-enneal data size of engine control device width mm size of engine control device width mm fro fastening method mounting position required spacing with side-by-side mounting supparative tolerance of the control supply voltage at DC required spacing with side-by-side mounting space was an anapon mounting serve and snapon mounting with vertical mounting surface +/-10" citable to the front and back required spacing with side-by-side mounting supparative tolerance with vertical mounting surface +/-10" citable to the front and back required spacing with side-by-side mounting with vertical mounting surface +/-10" citable to the front and back required spacing with side-by-side mounting mm 60 40 man 40 mounting position mm 60 60 man 50 mm 60 60 man 60 60 man 60 man 60 60 man 60 man 60 60 man 60 man 60 man 60 60 man 60 man 60 man 60 man 60 mumber of Polic contacts for auxiliary contacts 10 10 mumber of NC contacts for auxiliary contacts 11 12 mumber of NC contacts for auxiliary contacts 12 mumber of NC contacts for auxiliary contacts 13 mumber of NC contacts for auxiliary contacts 14 mumber of NC contacts for auxiliary contacts 15 mm yep of connectable conductor cross-sections for main contacts for box terminal using the front clamping point exitanced 15 mm 22 (15 mm) 22 (15 mm) 23 mm 24 (15 mm) 24 (15 mm) 25 mm) 26 (15 mm) 27 mm) 28 mm 29 mm 20 mm 20 mm 20	control supply voltage 1 at AC at 50 Hz	V	110 230
AC at 90 HZ relative positive tolerance of the control supply voltage at AC at 50 HZ relative positive tolerance of the control supply voltage at AC at 60 HZ relative positive tolerance of the control supply voltage at AC at 60 HZ relative positive tolerance of the control supply voltage at AC at 60 HZ relative positive tolerance of the control supply voltage at BC relative positive tolerance of the control supply voltage at BC relative positive tolerance of the control supply voltage at BC relative positive tolerance of the control supply voltage at BC relative positive tolerance of the control supply voltage at BC relative positive tolerance of the control supply voltage at BC relative positive tolerance of the control supply voltage at BC relative positive tolerance of the control supply voltage at BC relative positive tolerance of the control supply voltage at BC relative positive tolerance of the control supply voltage at BC relative positive tolerance of the control supply voltage at BC relative positive tolerance of the control supply voltage at BC relative positive tolerance of the control supply voltage at BC relative positive tolerance of the control supply voltage at BC relative positive tolerance of the control supply voltage at BC relative positive tolerance of the control supply voltage at BC relative positive tolerance of the control supply voltage at BC relative positive tolerance of the control supply voltage at BC relative positive tolerance of the control supply voltage at BC relative positive tolerance of the control supply voltage at BC relative positive tolerance of the control supply voltage at BC relative positive tolerance of the control supply voltage at BC relative positive tolerance of the control supply voltage at BC relative positive tolerance of the control supply voltage at BC relative positive tolerance of the control supply voltage at BC relative positive tolerance of the control supply voltage at BC relative positive tolerance of the control supl	control supply voltage 1 at AC at 60 Hz	V	110 230
AC at 50 Hz relative negative tolorance of the control supply voltage at AC at 50 Hz relative positive tolorance of the control supply voltage at 50 Hz Control supply voltage 1 at DC relative positive tolerance of the control supply voltage at DC relative positive tolerance of the control supply voltage at DC relative positive tolerance of the control supply voltage at DC relative positive tolerance of the control supply voltage at DC relative positive tolerance of the control supply voltage at DC display version for fault signal Mischanical data size of engine control device width		%	-10
AC at 60 Hz relative positive tolerance of the control supply voltage at AC at 50 Hz crelative negative tolerance of the control supply voltage at DC relative negative tolerance of the control supply voltage at DC relative negative tolerance of the control supply voltage at DC relative positive tolerance of the control supply voltage at DC display version for fault signal Machanical data size of engine control device size of engine control device width mm 55 height mm 160 depth mm 170 fastening method mounting position With vertical mounting surface +/- 10° tolatable, with vertical mounting surface +/- 10° tolatable to the front and back required spacing with side-by-side mounting upwards at the side at the side at the side at mm 30 aumber of poles for main current circuit connections// Terminals Type of electrical connection a for main current circuit a connections// Terminals Type of connectable conductor cross-sections for main contacts for box terminal using the front clamping point a similared		%	10
AC at 80 Hz control supply voltage 1 at DC relative negative tolerance of the control supply voltage at DC relative positive tolerance of the control supply voltage at DC display version for fault signal Machanical data size of engine control device width mm 55 width height mm 160 depth mm 170 fastening method screw and snap-on mounting mounting position mm 170 fastening method screw and snap-on mounting surface +/-10" rotatable, with vertical mounting surface +/-10" distable to the front and back required spacing with side-by-side mounting • upwards • at the side mm 30 • downwards mm 40 wire length maximum m 300 number of poles for main current circuit Connections! Terminals type of electrical connection • for main current circuit sorew-type terminals • for auxiliary and control circuit number of NC contacts for auxiliary contacts number of NC contacts for auxiliary contacts number of NC contacts for auxiliary contacts 1 number of NC contacts for auxiliary contacts 1 contacts for box terminal using the front clamping point • solid • finely stranded with core end processing • stranded 1,5, 25 mm² 1,5, 25 mm² 2x (1,5, 16 mm²) • stranded 4type of connectable conductor cross-sections for main contacts for box terminal using both clamping point • solid • finely stranded with core end processing • stranded 4type of connectable conductor cross-sections for main contacts for box terminal using both clamping point • solid • finely stranded with core end processing • stranded 4type of connectable conductor cross-sections for main contacts for box terminal using both clamping point • solid • finely stranded with core end processing • stranded 4type of connectable conductor cross-sections for MWG cables for main contacts for box terminal using both clamping point • stranded 4type of connectable conductor cross-sections for AWG cables for main contacts for box terminal using both clamping point		%	-10
relative negative tolerance of the control supply voltage at DC relative positive tolerance of the control supply voltage at DC display version for fault signal red		%	10
relative positive tolerance of the control supply voltage at DC display version for fault signal Mechanical data size of engine control device width mm 55 height mm 160 depth mm 170 fastening method mounting position required spacing with side-by-side mounting • upwards mm 60 • at the side mm 30 • at the side odownwards mm 40 wire length maximum mm 40 wire length maximum mm 40 wire length maximum mm 300 number of poles for main current circuit • for auxiliary and control circuit • for auxiliary and control circuit • for auxiliary and control circuit • for contacts for auxiliary contacts number of CO contacts for auxiliary contacts 1 number of CO contacts for auxiliary contacts 1 type of connectable conductor cross-sections for main contacts for box terminal using the front clamping point • solid • finely stranded with core end processing • stranded type of connectable conductor cross-sections for main contacts for box terminal using the front clamping point • solid • finely stranded with core end processing • stranded type of connectable conductor cross-sections for main contacts for box terminal using the back clamping point • solid • finely stranded with core end processing • stranded type of connectable conductor cross-sections for main contacts for box terminal using the back clamping point • solid • finely stranded with core end processing • stranded type of connectable conductor cross-sections for main contacts for box terminal using the back clamping point • solid • finely stranded with core end processing • stranded type of connectable conductor cross-sections for main contacts for box terminal using both clamping points • solid • finely stranded with core end processing • stranded type of connectable conductor cross-sections for main contacts for box terminal using both clamping points • solid • finely stranded with core end processing • stranded	control supply voltage 1 at DC	V	110 230
display version for fault signal Mechanical data size of engine control device width		%	-10
size of engine control device size of engine control device width height depth mm 160 depth mm 170 fastening method mounting position with vertical mounting surface +/-10" rotatable, with vertical mounting surface +/-10" rotatable, with vertical mounting surface +/-10" tiliable to the front and back required spacing with side-by-side mounting • upwards • at the side • downwards wire length maximum m 300 number of poles for main current circuit • for main current circuit • for main current circuit • for auxiliary and control circuit number of NC contacts for auxiliary contacts 1 number of NC contacts for auxiliary contacts 1 type of connectable conductor cross-sections for main contacts for box terminal using the front clamping point • solid • finely stranded with core end processing • stranded type of connectable conductor cross-sections for main contacts for box terminal using the back clamping point • solid • finely stranded with core end processing • stranded type of connectable conductor cross-sections for main contacts for box terminal using the back clamping point • solid • finely stranded with core end processing • stranded type of connectable conductor cross-sections for main contacts for box terminal using both clamping points • solid • solid • finely stranded with core end processing • stranded type of connectable conductor cross-sections for main contacts for box terminal using both clamping points • solid • finely stranded with core end processing • stranded type of connectable conductor cross-sections for main contacts for box terminal using both clamping points • solid • finely stranded with core end processing • stranded type of connectable conductor cross-sections for saling contacts for box terminal using both clamping points • solid • finely stranded with core end processing • stranded type of connectable conductor cross-sections for saling contacts for box terminal		%	10
size of engine control device size of engine control device width height depth mm 160 depth mm 170 fastening method mounting position with vertical mounting surface +/-10" rotatable, with vertical mounting surface +/-10" rotatable, with vertical mounting surface +/-10" tiliable to the front and back required spacing with side-by-side mounting • upwards • at the side • downwards wire length maximum m 300 number of poles for main current circuit • for main current circuit • for main current circuit • for auxiliary and control circuit number of NC contacts for auxiliary contacts 1 number of NC contacts for auxiliary contacts 1 type of connectable conductor cross-sections for main contacts for box terminal using the front clamping point • solid • finely stranded with core end processing • stranded type of connectable conductor cross-sections for main contacts for box terminal using the back clamping point • solid • finely stranded with core end processing • stranded type of connectable conductor cross-sections for main contacts for box terminal using the back clamping point • solid • finely stranded with core end processing • stranded type of connectable conductor cross-sections for main contacts for box terminal using both clamping points • solid • solid • finely stranded with core end processing • stranded type of connectable conductor cross-sections for main contacts for box terminal using both clamping points • solid • finely stranded with core end processing • stranded type of connectable conductor cross-sections for main contacts for box terminal using both clamping points • solid • finely stranded with core end processing • stranded type of connectable conductor cross-sections for saling contacts for box terminal using both clamping points • solid • finely stranded with core end processing • stranded type of connectable conductor cross-sections for saling contacts for box terminal			red
size of engine control device width mm 55 height mm 160 depth mm 170 fastening method mounting position mounting position mounting position with evertical mounting surface +/-10" rotatable, with vertical mounting surface +/-10" littlable to the front and back required spacing with side-by-side mounting			
width mm 55 helght mm 160 depth mm 170 screw and snap-on mounting mounting position With vertical mounting surface +/-10" rotatable, with vertical mounting surface +/-10" rotatable, with vertical mounting surface +/-10" tiltable to the front and back required spacing with side-by-side mounting • upwards mm 60 • upwards mm 30 • at the side mm 30 • downwards mm 40 wire length maximum mm 3000 number of poles for main current circuit 3 Connections/Terminals type of electrical connection • for main current circuit screw-type terminals unwher of NC contacts for auxiliary contacts number of NC contacts for auxiliary contacts 10 number of NO contacts for auxiliary contacts 11 number of NO contacts for auxiliary contacts 12 type of connectable conductor cross-sections for main contacts for box terminal using the front clamping point 15 25 mm² • stranded 15 25 mm² • stranded 15 25 mm² • stranded 15 35 mm² 2x (1.5 16 mm²) 1.5 35 mm² 2x (1.5 16 mm²) 1.5 35 mm² 2x (1.5 16 mm²) 2x (1.5 16 mm²) 1.5 35 mm² 2x (1.5 16 mm²)			S2
height depth mm 170 fastening method screw and snap-on mounting mounting position With vertical mounting surface +/-10" rotatable, with vertical mounting surface +/-10" tittable to the front and back required spacing with side-by-side mounting upwards mm 60 at the side mm 30 at the side mm 30 wire length maximum m 300 number of poles for main current circuit 3 Connections/ Terminals type of electrical connection for auxiliary and control circuit screw-type terminals number of NO contacts for auxiliary contacts number of NO contacts for auxiliary contacts 1 number of CO contacts for auxiliary contacts 1 number of CO contacts for auxiliary contacts 1 type of connectable conductor cross-sections for main contacts for box terminal using the front clamping point solid finely stranded with core end processing		mm	
depth mm 170 fastening method screw and snap-on mounting mounting position With vertical mounting surface +/-10" rotatable, with vertical mounting surface +/-10" tiltable to the front and back required spacing with side-by-side mounting • upwards mm 60 • at the side mm 30 • downwards mm 40 mm 40 mm 40 mile length maximum m 300 number of poles for main current circuit connections/ Terminals type of electrical connection • for main current circuit screw-type terminals number of NC contacts for auxiliary contacts 1 number of NC contacts for auxiliary contacts 1 number of NC contacts for auxiliary contacts 0 type of connectable conductor cross-sections for main contacts for box terminal using the front clamping point • solid • finely stranded with core end processing • stranded type of connectable conductor cross-sections for main contacts for box terminal using the back clamping point • solid • finely stranded with core end processing • stranded type of connectable conductor cross-sections for main contacts for box terminal using the back clamping point • solid • finely stranded with core end processing • stranded type of connectable conductor cross-sections for main contacts for box terminal using the back clamping points • solid • finely stranded with core end processing • stranded type of connectable conductor cross-sections for main contacts for box terminal using both clamping points • solid • finely stranded with core end processing • stranded type of connectable conductor cross-sections for AWG cables for main contacts for box terminal			
fastening method mounting position With vertical mounting surface +/-10° rotatable, with vertical mounting surface +/-10° tiltable to the front and back and mounting surface +/-10° tiltable to the front and back and mounting surface +/-10° tiltable, with vertical mounting surface +/-10° tiltable to the front and back and mounting surface +/-10° tiltable to the front and back and mounting surface +/-10° tiltable to the front and back and mounting surface +/-10° tiltable to the front and back and mounting surface +/-10° tiltable to the front and back and mounting surface +/-10° tiltable to the front and back and mounting surface +/-10° tiltable to the front and back and mounting surface +/-10° tiltable to the front and back and mounting surface +/-10° tiltable to the front and back and mounting surface +/-10° tiltable to the front and back and mounting surface +/-10° tiltable to the front and back and mounting surface +/-10° tiltable to the front and back and surface surface +/-10° tiltable to the fron			
mounting position With vertical mounting surface +/-10° rotatable, with vertical mounting surface +/-10° rotatable, with vertical mounting surface +/-10° tiltable to the front and back required spacing with side-by-side mounting upwards at the side downwards mm 40 wire length maximum number of poles for main current circuit of or all current circuit for auxiliary and control circuit screw-type terminals type of electrical connection of or main current circuit for auxiliary and control circuit screw-type terminals screw-type terminals screw-type terminals 10 number of NC contacts for auxiliary contacts number of NC contacts for auxiliary contacts type of connectable conductor cross-sections for main contacts for box terminal using the front clamping point solid finely stranded with core end processing stranded type of connectable conductor cross-sections for main contacts for box terminal using the back clamping point solid finely stranded with core end processing stranded type of connectable conductor cross-sections for main contacts for box terminal using the back clamping point solid finely stranded with core end processing stranded type of connectable conductor cross-sections for main contacts for box terminal using both clamping points solid finely stranded with core end processing stranded type of connectable conductor cross-sections for main contacts for box terminal using both clamping points solid finely stranded with core end processing stranded type of connectable conductor cross-sections for main contacts for box terminal using both clamping points solid finely stranded with core end processing stranded type of connectable conductor cross-sections for AWG cables for main contacts for box terminal	·	111111	
required spacing with side-by-side mounting • upwards • at the side • downwards • at the side • downwards wire length maximum number of poles for main current circuit Connections/ Terminals type of electrical connection • for anxillary and control circuit number of NO contacts for auxillary contacts number of NO contacts for auxillary contacts 1 number of CO contacts for auxillary contacts 1 type of connectable conductor cross-sections for main contacts for box terminal using the back clamping point • solid • finely stranded type of connectable conductor cross-sections for main contacts for box terminal using the back clamping point • solid • finely stranded with core end processing • stranded type of connectable conductor cross-sections for main contacts for box terminal using the back clamping point • solid • finely stranded with core end processing • stranded type of connectable conductor cross-sections for main contacts for box terminal using both clamping points • solid • finely stranded with core end processing • stranded type of connectable conductor cross-sections for main contacts for box terminal using both clamping points • solid • finely stranded with core end processing • stranded type of connectable conductor cross-sections for main contacts for box terminal using both clamping points • solid • finely stranded with core end processing • stranded type of connectable conductor cross-sections for main contacts for box terminal using both clamping points • solid • finely stranded with core end processing • stranded type of connectable conductor cross-sections for AWG cables for main contacts for box terminal		-	
• upwards • at the side • downwards • downwards mm	mounting position		
• at the side • downwards • downwards wire length maximum number of poles for main current circuit Connections/ Terminals type of electrical connection • for main current circuit • for auxiliary and control circuit number of NO contacts for auxiliary contacts number of NO contacts for auxiliary contacts number of CO contacts for auxiliary contacts type of connectable conductor cross-sections for main contacts for box terminal using the front clamping point • solid • finely stranded with core end processing • stranded type of connectable conductor cross-sections for main contacts for box terminal using the back clamping point • solid • finely stranded with core end processing • stranded type of connectable conductor cross-sections for main contacts for box terminal using the back clamping point • solid • finely stranded with core end processing • stranded type of connectable conductor cross-sections for main contacts for box terminal using both clamping points • solid • finely stranded with core end processing • stranded type of connectable conductor cross-sections for main contacts for box terminal using both clamping points • solid • finely stranded with core end processing • stranded type of connectable conductor cross-sections for MWG cables for main contacts for box terminal	required spacing with side-by-side mounting		
downwards	• upwards	mm	60
downwards	1	mm	30
mire length maximum m 300 number of poles for main current circuit 3 Connections/ Terminals type of electrical connection • for main current circuit screw-type terminals • for auxiliary and control circuit screw-type terminals • for auxiliary and control circuit screw-type terminals • for auxiliary contacts for auxiliary contacts number of NO contacts for auxiliary contacts number of CO contacts for auxiliary contacts type of connectable conductor cross-sections for main contacts for box terminal using the front clamping point • solid • finely stranded with core end processing • stranded type of connectable conductor cross-sections for main contacts for box terminal using the back clamping point • solid • finely stranded with core end processing • stranded type of connectable conductor cross-sections for main contacts for box terminal using both clamping points • solid • finely stranded with core end processing • stranded type of connectable conductor cross-sections for main contacts for box terminal using both clamping points • solid • finely stranded with core end processing • stranded • finely stranded with core end processing • stranded type of connectable conductor cross-sections for AWG cables for main contacts for box terminal			
number of poles for main current circuit Connections/ Terminals type of electrical connection • for main current circuit • for auxiliary and control circuit number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts number of CO contacts for auxiliary contacts number of CO contacts for auxiliary contacts type of connectable conductor cross-sections for main contacts for box terminal using the front clamping point • solid • solid • stranded type of connectable conductor cross-sections for main contacts for box terminal using the back clamping point • solid • solid • solid • solid • finely stranded with core end processing • stranded • finely stranded with core end processing • stranded • finely stranded with core end processing • stranded • finely stranded with core end processing • stranded • finely stranded with core end processing • stranded • finely stranded with core end processing • stranded • solid • finely stranded with core end processing • stranded • solid • finely stranded with core end processing • stranded • strander • stra	wire length maximum		
type of electrical connection			
type of electrical connection • for main current circuit • for auxiliary and control circuit number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts number of CO contacts for auxiliary contacts number of CO contacts for auxiliary contacts type of connectable conductor cross-sections for main contacts for box terminal using the front clamping point • solid • solid • stranded type of connectable conductor cross-sections for main contacts for box terminal using the back clamping point • solid • solid • finely stranded with core end processing • finely stranded with core end processing • finely stranded with core end processing • stranded type of connectable conductor cross-sections for main contacts for box terminal using the back clamping point • solid • finely stranded with core end processing • stranded type of connectable conductor cross-sections for main contacts for box terminal using both clamping points • solid • solid • solid • stranded type of connectable conductor cross-sections for main contacts for box terminal using both clamping points • solid • stranded type of connectable conductor cross-sections for MWG cables for main contacts for box terminal	·		
• for main current circuit • for auxiliary and control circuit screw-type terminals screw-type terminals screw-type terminals screw-type terminals screw-type terminals o number of NC contacts for auxiliary contacts 1 number of CO contacts for auxiliary contacts type of connectable conductor cross-sections for main contacts for box terminal using the front clamping point • solid • solid • finely stranded with core end processing • stranded type of connectable conductor cross-sections for main contacts for box terminal using the back clamping point • solid • finely stranded with core end processing • finely stranded with core end processing • stranded type of connectable conductor cross-sections for main contacts for box terminal using both clamping points • solid			
for auxiliary and control circuit number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts number of CO contacts for auxiliary contacts 1 number of CO contacts for auxiliary contacts type of connectable conductor cross-sections for main contacts for box terminal using the front clamping point			screw-type terminals
number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts number of CO contacts for auxiliary contacts type of connectable conductor cross-sections for main contacts for box terminal using the front clamping point • solid • finely stranded with core end processing • stranded • solid • siranded with core end processing • stranded • solid • solid • stranded • stranded • solid • solid • solid • stranded • solid • solid • solid • solid • solid • solid • stranded • solid •			
number of NO contacts for auxiliary contacts number of CO contacts for auxiliary contacts type of connectable conductor cross-sections for main contacts for box terminal using the front clamping point • solid • solid • finely stranded with core end processing • stranded type of connectable conductor cross-sections for main contacts for box terminal using the back clamping point • solid • solid • sinely stranded with core end processing • stranded • stranded type of connectable conductor cross-sections for main contacts for box terminal using both clamping points • stranded type of connectable conductor cross-sections for main contacts for box terminal using both clamping points • solid • solid 2x (1.5 16 mm²) 1.5 25 mm² 2x (1.5 16 mm²) 2x (1.5 16 mm²) • stranded 2x (1.5 16 mm²) 2x (1.5 16 mm²) • stranded 2x (1.5 25 mm²)	·		
number of CO contacts for auxiliary contacts type of connectable conductor cross-sections for main contacts for box terminal using the front clamping point • solid • finely stranded with core end processing • stranded type of connectable conductor cross-sections for main contacts for box terminal using the back clamping point • solid • solid • stranded type of connectable conductor cross-sections for main contacts for box terminal using the back clamping point • solid • stranded type of connectable conductor cross-sections for main contacts for box terminal using both clamping points • solid • solid 2x (1.5 16 mm²) 1.5 25 mm² 1.5 35 mm² type of connectable conductor cross-sections for main contacts for box terminal using both clamping points • solid 2x (1.5 16 mm²) 2x (1.5 16 mm²) 2x (1.5 16 mm²) • stranded 2x (1.5 25 mm²)			
type of connectable conductor cross-sections for main contacts for box terminal using the front clamping point • solid • finely stranded with core end processing • stranded type of connectable conductor cross-sections for main contacts for box terminal using the back clamping point • solid • finely stranded with core end processing • stranded type of connectable conductor cross-sections for main contacts for box terminal using the back clamping point • solid • solid • solid type of connectable conductor cross-sections for main contacts for box terminal using both clamping points • solid • solid • solid • solid • solid • finely stranded with core end processing • stranded type of connectable conductor cross-sections for AWG cables for main contacts for box terminal			
solid finely stranded with core end processing stranded 1.5 25 mm² 1.5 25 mm² type of connectable conductor cross-sections for main contacts for box terminal using the back clamping point solid solid finely stranded with core end processing stranded 1.5 25 mm² stranded 1.5 35 mm² type of connectable conductor cross-sections for main contacts for box terminal using both clamping points solid finely stranded with core end processing stranded 2x (1.5 16 mm²) 2x (1.5 16 mm²) stranded 2x (1.5 16 mm²) stranded 2x (1.5 25 mm²) type of connectable conductor cross-sections for AWG cables for main contacts for box terminal	type of connectable conductor cross-sections for main		
• finely stranded with core end processing • stranded 1.5 25 mm² 1.5 35 mm² type of connectable conductor cross-sections for main contacts for box terminal using the back clamping point • solid • finely stranded with core end processing • stranded type of connectable conductor cross-sections for main contacts for box terminal using both clamping points • solid • finely stranded with core end processing • stranded 2x (1.5 16 mm²) 2x (1.5 16 mm²) 2x (1.5 16 mm²) • stranded type of connectable conductor cross-sections for AWG cables for main contacts for box terminal			2x (1.5 16 mm²)
● stranded type of connectable conductor cross-sections for main contacts for box terminal using the back clamping point ● solid ● stranded with core end processing ● stranded type of connectable conductor cross-sections for main contacts for box terminal using both clamping points ● solid ● solid ● solid ● solid ● solid ● sinely stranded with core end processing ● stranded 2x (1.5 16 mm²) 2x (1.5 25 mm²)			
contacts for box terminal using the back clamping point • solid • finely stranded with core end processing • stranded type of connectable conductor cross-sections for main contacts for box terminal using both clamping points • solid • stranded 2x (1.5 16 mm²) 2x (1.5 35 mm² 2x (1.5 16 mm²) 2x (1.5 16 mm²) 2x (1.5 16 mm²) 2x (1.5 16 mm²) 2x (1.5 25 mm²) type of connectable conductor cross-sections for AWG cables for main contacts for box terminal	• stranded		
• finely stranded with core end processing • stranded 1.5 25 mm² type of connectable conductor cross-sections for main contacts for box terminal using both clamping points • solid 2x (1.5 16 mm²) • finely stranded with core end processing • stranded 2x (1.5 25 mm²) type of connectable conductor cross-sections for AWG cables for main contacts for box terminal	contacts for box terminal using the back clamping point		
● stranded type of connectable conductor cross-sections for main contacts for box terminal using both clamping points ● solid ● sinely stranded with core end processing ● stranded type of connectable conductor cross-sections for AWG cables for main contacts for box terminal			
contacts for box terminal using both clamping points • solid • finely stranded with core end processing • stranded type of connectable conductor cross-sections for AWG cables for main contacts for box terminal			
 finely stranded with core end processing stranded 2x (1.5 16 mm²) 2x (1.5 25 mm²) type of connectable conductor cross-sections for AWG cables for main contacts for box terminal 	**		
• stranded	• solid		2x (1.5 16 mm²)
type of connectable conductor cross-sections for AWG cables for main contacts for box terminal			
• using the back clamping point 16 2	type of connectable conductor cross-sections for AWG		2x (1.9 29 IIIIII')
	using the back clamping point		16 2

 using the front clamping point 		18 2
using both clamping points		2x (16 2)
type of connectable conductor cross-sections for auxiliary contacts		
• solid		2x (0.5 2.5 mm²)
finely stranded with core end processing		2x (0.5 1.5 mm²)
type of connectable conductor cross-sections for AWG cables		
 for auxiliary contacts 		2x (20 14)
 for auxiliary contacts finely stranded with core end processing 		2x (20 16)
Ambient conditions		
installation altitude at height above sea level	m	5 000
environmental category		
 during transport according to IEC 60721 		2K2, 2C1, 2S1, 2M2 (max. fall height 0.3 m)
 during storage according to IEC 60721 		1K6 (only occasional condensation), 1C2 (no salt mist), 1S2 (sand must not get inside the devices), 1M4
during operation according to IEC 60721		3K6 (no formation of ice, no condensation), 3C3 (no salt mist), 3S2 (sand must not get into the devices), 3M6
ambient temperature		
 during operation 	°C	-25 +60
during storage	°C	-40 +80
derating temperature	°C	40
protection class IP on the front according to IEC 60529		IP20
touch protection on the front according to IEC 60529		finger-safe, for vertical contact from the front
UL/CSA ratings		
yielded mechanical performance [hp] for 3-phase AC motor		
• at 220/230 V		
 at standard circuit at 50 °C rated value 	hp	15
• at 460/480 V		
— at standard circuit at 50 °C rated value	hp	30
contact rating of auxiliary contacts according to UL		B300 / R300
Approvals Certificates		

General Product Approval









Confirmation



General Product Approval EMV Test Certificates other





<u>ate</u>

<u>KC</u>

Special Test Certificate

firmations

Type Test Certificates/Test Report

Miscellaneous

 other
 Railway
 Environment

 Confirmation
 Special Test Certific Confirmation
 Environmental Con

Further information

Simulation Tool for Soft Starters (STS)

https://support.industry.siemens.com/cs/ww/en/view/101494917

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RW3036-1BB14


Cax online generator


http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RW3036-1BB14

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


https://support.industry.siemens.com/cs/ww/en/ps/3RW3036-1BB14

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RW3036-1BB14&lang=en







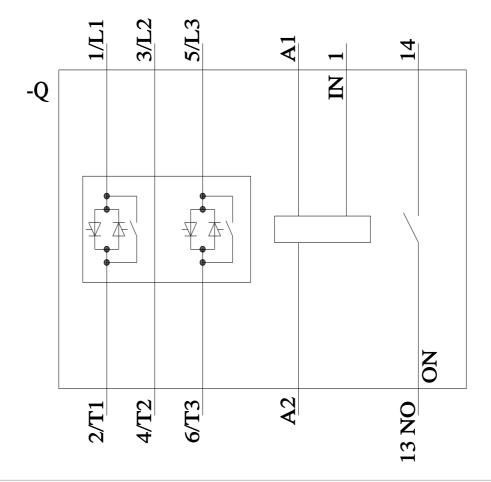

last modified: 3/11/2024 🖸